Device Development

PRICE $5.00

POWER SUPPLY

DC POWER SUPPLY

MODEL PR 155-1, -1M

SERIAL NO. C 355-33

INSTRUCTION MANUAL

kepco inc.®

131-38 SANFORD AVENUE • FLUSHING 52, N. Y.
Area Code 212 IN 1-7000 • TWX # NY 4-5196

INSTRUCTION MANUAL

DC POWER SUPPLY

MODEL PR 155-1, -1M

SERIAL NO. C 355-33

STANDARD POLICY COVERING REPRODUCTION AND USE OF TECHNICAL DATA FOR KEPCO MANUFACTURED EQUIPMENT

The technical data submitted, including manuals, parts information, and mechanical and electrical drawings, is furnished solely for the purpose of effecting maintenance and/or repairs to the apparatus therein described and the purchaser or the Government shall not reproduce, use, or disclose the said technical data, in whole or in part, for any other purpose. Such technical data shall not be used for promotional procurement, development or manufacturing purposes, nor shall the purchaser or the Government permit the reproduction, use, or disclosure of any part of said technical data by others. The purchaser shall notify the Government of the purchaser's limited right in the use of said technical data for aforesaid purposes. In the event that any part of this technical data is used by anyone for other than the above authorized purposes, the purchaser will give all assistance possible for the prosecution of action against any unauthorized use thereof.

TABLE OF CONTENTS

	PAGE NO.
ELECTRICAL AND PHYSICAL SPECIFICATIONS	A-1
TERMINALS AND CONTROLS	A-2
GENERAL OPERATING INSTRUCTIONS	A-3

APPENDIX

PARTS LIST

SCHEMATIC DIAGRAMS

Digitized by the Internet Archive
in 2025

https://archive.org/details/manualsplus_08319

KEPCO, INC.
VOLTAGE REGULATED POWER SUPPLIES MODEL PR155-1, (-1M)

A-1 ELECTRICAL AND PHYSICAL SPECIFICATIONS

....DC OUTPUT: 0-155 volts, at 0-1 amperes.

Output voltage continuously adjustable through two overlapping ranges: 0 to approximately 80 volts (Low); and approximately 80 volts to 155 volts (High). A residual voltage of not more than 150 mv (approximately 0.1% of the maximum output voltage) exists at the output when the control is set to zero, at no load.

....AC INPUT: 115 volts, ±10 v; 60 cps, ±5%; 3 amperes.

Changes in line frequency within stated frequency tolerances produce approximately equal and linear % changes in output voltage.

....LINE REGULATION: ±1% for ±10 volt change in AC line voltage; at maximum rated output voltage and current.

....LOAD REGULATION: Specified at maximum rated output voltage, with the load connected to the rear output terminals:

Less than 2% for a change in load current between full-load and half-load.

Less than 4% for a change in load current between full-load and quarter-load.

....RIPPLE: Less than 1% (rms) at maximum rated output voltage and current.

....AMBIENT OPERATING TEMPERATURE: -20 C to +55 C.

....STORAGE TEMPERATURE: -40 C to +85 C.

....DIMENSIONS: Height 3-1/2"; Width 19"; Depth 13-7/8" behind panel.

....COLOR: Kepco Standard Gray Hammertone.

....WEIGHT: 45 pounds.

....MOUNTING: Standard rack, or bench.

....METERS: (On Models with suffix "M" on Model number.)
Voltmeter 0-200 volts DC, 2-1/2".
Ammeter 0-1 amperes DC, 2-1/2".

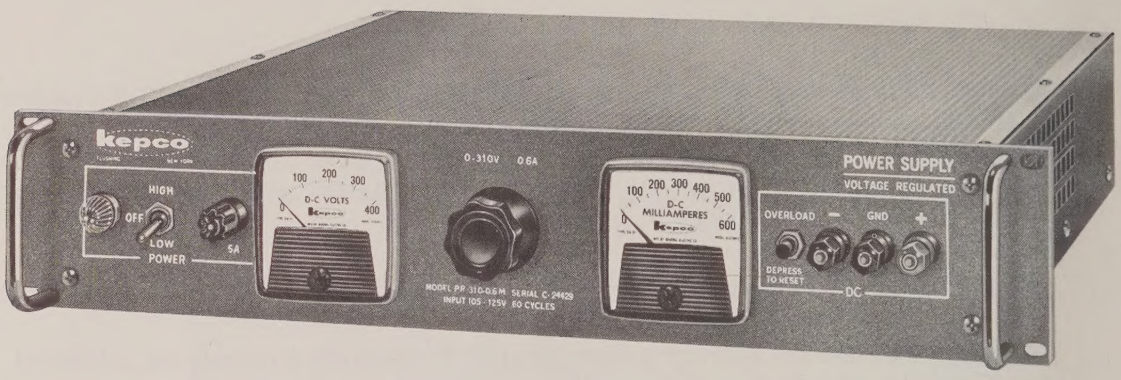

PR 310-0.6 (Typical of all 3-1/2" high PR Models)

A-2 TERMINALS AND CONTROLS -

- (On Front Panel):

....POWER: Three position toggle switch "Low-Off-High" turns the Supply On and selects the DC output voltage range when set to either "Low" or "High" position. Pilot Light and Input Fuse.

....VOLTAGE CONTROL: Adjustable control for setting the output voltage within either range selected.

....DC: Overload breaker, Depress To Reset; and three 5-way output binding posts marked (-), (GND), and (+).

- (On Rear of Supply):

....DC: Additional 5-way binding posts for DC output.

....INPUT: Three-wire safety ground line cord.

A-3 GENERAL OPERATING INSTRUCTIONS

This KEPCO Regulated Power Supply consists of a regulated, adjustable-voltage AC power source, supplied by a KEPCO "Flux-O-Tran" constant voltage transformer. The AC source is followed by a full-wave semi-conductor rectifier and capacitive filter, of characteristically low internal impedance. The Supply is designed to furnish DC power, at voltage which can be set to any value over a continuously adjustable range; and to maintain that voltage constant within regulation specification as the line voltage and load change.

....INSTALLATION

The Power Supply is shipped without any internal packing material and may be put into operation immediately. It is equipped with carrying handles on the front panel, and is completely encased for bench use. It is also designed so that it may be installed directly on a standard 19-inch rack. Air is circulated through the side panel openings by the internal fan unit.

The ground pin (green wire) of the three-wire line cord is connected internally to the chassis for grounding purposes. When the two-prong receptacle adaptor supplied with the unit is used, the green pigtail lead must be connected to a suitable ground connection in order to ground the chassis.

....DC OUTPUT

The load regulation has been specified for operation with the load connected to the rear output terminals. When the load is connected to the front panel terminals, the load regulation will include any voltage drop in the internal bus connected between the front and rear binding posts.

The DC output is isolated from the chassis, and from the AC power line. Either Positive or Negative output terminal may be grounded. The Ground terminal on the back of the unit is equipped with a jumper link for this purpose. (Be sure to check the position of this link at the rear, before attempting to ground one of the front-panel output terminals).

The design of this Power Supply includes a very high value of capacitance across the output. Due to the charge developed across this capacitor, the voltage across the output terminals will sometimes fall at a slower rate when the output voltage is turned down, or off, depending on the value of internal bleeder resistance and the value of any external load still applied.

....SERIES, PARALLEL OPERATION

The output of two or more PR Models may be connected in series, up to a maximum condition of potential between chassis and either output terminal not to exceed 400 volts.

The output of two or more PR Models may be connected in parallel for higher current requirements. It is necessary to carefully adjust the voltage control of each Supply for equal current from each unit.

....OVERLOAD PROTECTION

The KEPCO "Flux-O-Tran" transformer has an inherent current limiting characteristic which permits operation into an output overload of short duration. However, the circuit breaker will release and interrupt the output current in the event of a sustained overload, primarily to protect the voltage control.

....MAINTENANCE

Conservatively rated components assure a long trouble free operating life. Under normal operating conditions no major maintenance of any kind should be required. The fan motor may be lubricated lightly at about six-month intervals, and an occasional careful brushing or dusting of the interior to remove any accumulations of dust is suggested.

....FACTORY SERVICE

If it becomes necessary or desirable to return this equipment to KEPCO for repair, it should not be shipped to the factory without prior authorization and shipping instructions. The inclusion of detailed information with the unit, or in correspondence prior to its return, will greatly expedite the completion of repair work and return of the unit to the sender. In any correspondence to the factory about this Power Supply, the Model and Serial number should always be included.

TYPICAL RIPPLE CHARACTERISTICS

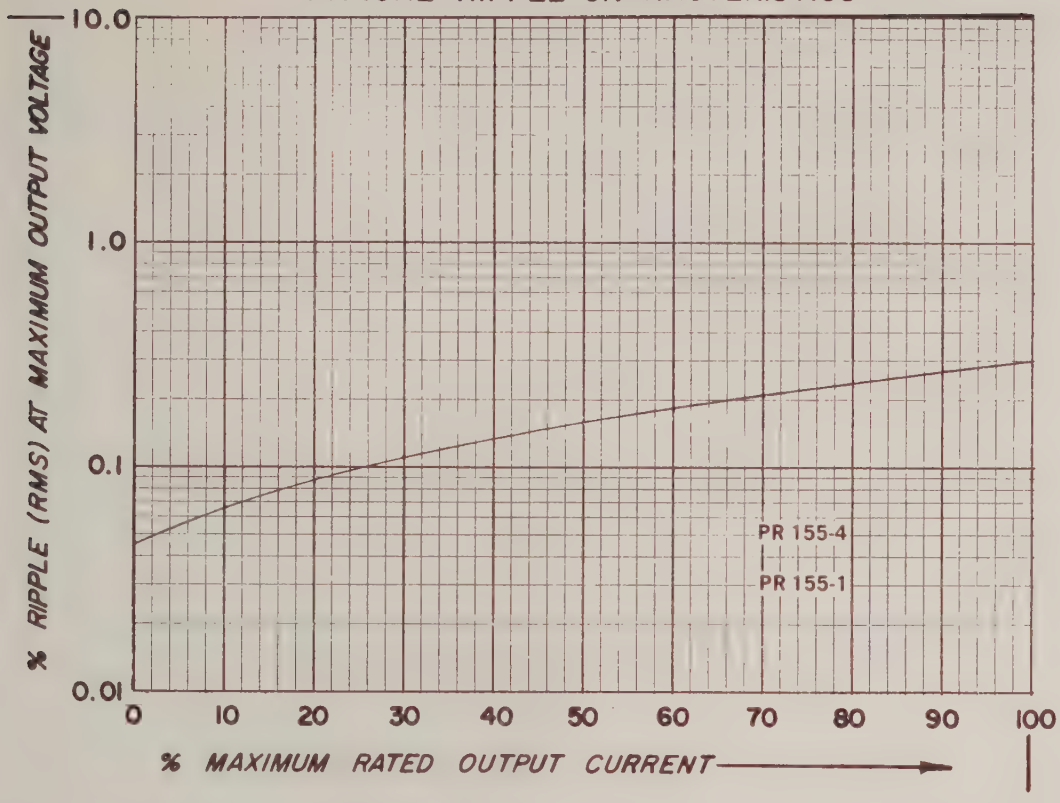

TYPICAL LINE REGULATION CHARACTERISTICS

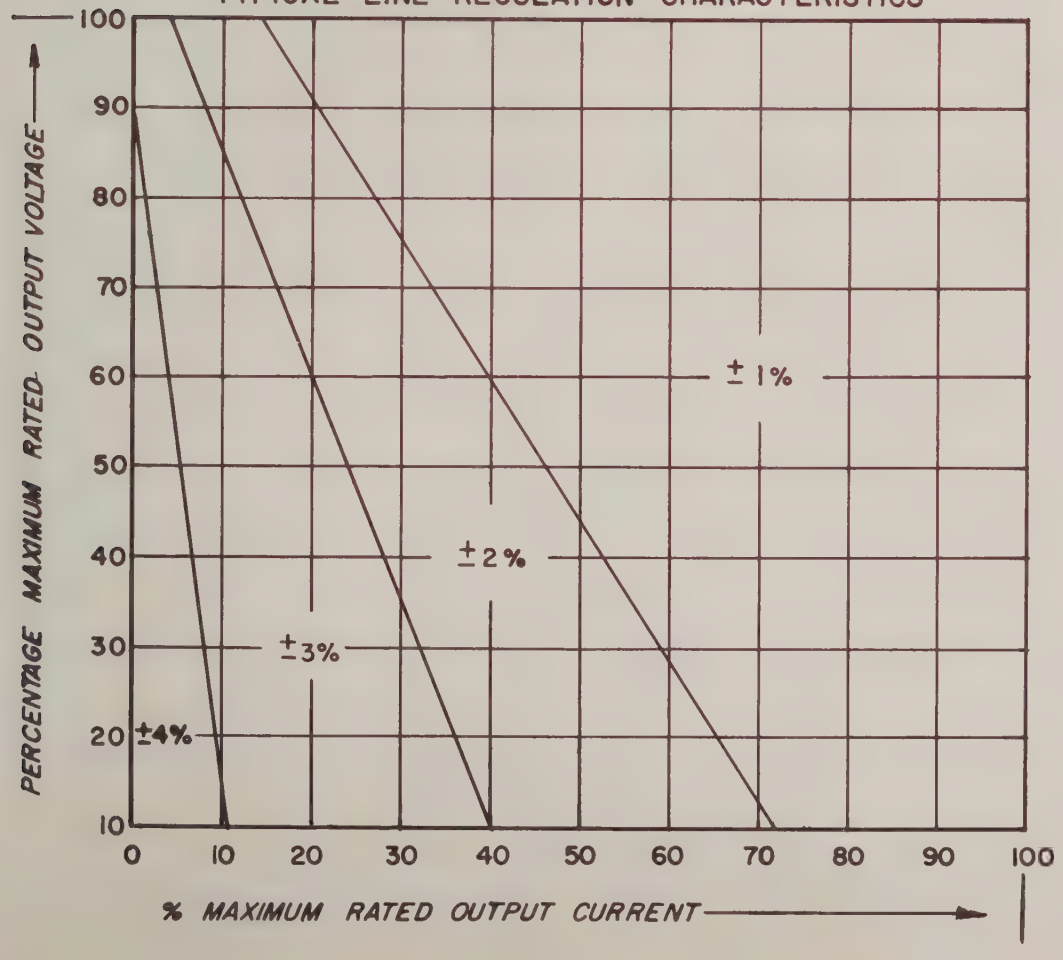

REPLACEMENT PARTS LIST

MODEL PR155-1, (-1M)
DWG NO BSK00255

CODE: 11-1361

SCHEMATIC NO	QTY	DESCRIPTION	MFRS NAME AND PART NO	KEPCO PART NO
B201	1	Motor	Barber-Colman KYAF764-1	148-0006
		Capacitors:		
C201	1	Paper, Can-type 2 µf, 660 v ac	General Electric 49F2322	117-0169
C202,203	2	Electrolytic, Can-type 1.1 K µf, 210v	Sangamo DCM	117-0283
CB101	1	Switch, Circuit, Breaker 2 a	ETA 45 702-P	127-0147
CR201	1	Rectifier,Silicon,Stack-type	Kepco 124-0126	124-0126
F101	1	Fuse, Instantaneous 5 a, 125 v	Bussmann MDX-5	141-0042
M101	1	Meter(Model PR155-1M only) 0-200 v, 2-1/2"	General Electric 8DW91V218AW2	135-0153
M102	1	Meter(Model PR155-1 M only) 0-1 a, 2-1/2"	General Electric 8 DW91A223BM2	135-0169
PL101	1	Pilot Light	General Electric NE-51	153-0024
R201	1	Resistor,Fixed,Power,Strip 1.5 K ohm, 5% 40w	Ward Leonard 40S1500	115-0977
S101	1	Switch 3PDT	Cutler-Hammer 7612-K2	127-0145
T101	1	Transformer	Superior 10B	175-0422
T201	1	Transformer, Flux-O-Tran	Kepco Mag. 100-1254	100-1254

FIELD REPLACEMENT LIST

Kepco Part No.	Description	Recommended Replacement MFR.	Mfr. No.
119-0003 119-0016	Transistor PNP	Delco	2N174
119-0022	Transistor PNP	Tung-Sol	2N382 2N1707
119-0034	Transistor PNP	Delco	2N1172
119-0035, 0036,0037	Transistor PNP	Motorola Clevite	2N1167 CTP 3553
119-0048	Transistor Unijunction	General Elec.	2N1671A
119-0020	Transistor PNP	RCA	2N398A
119-0038	Silicon NPN	Transitron	ST29
119-0004	Transistor PNP	Delco	2N277
119-0024	Transistor NPN	Gen. Instrument RCA Sylvania	2N1605 2N388 2N1308

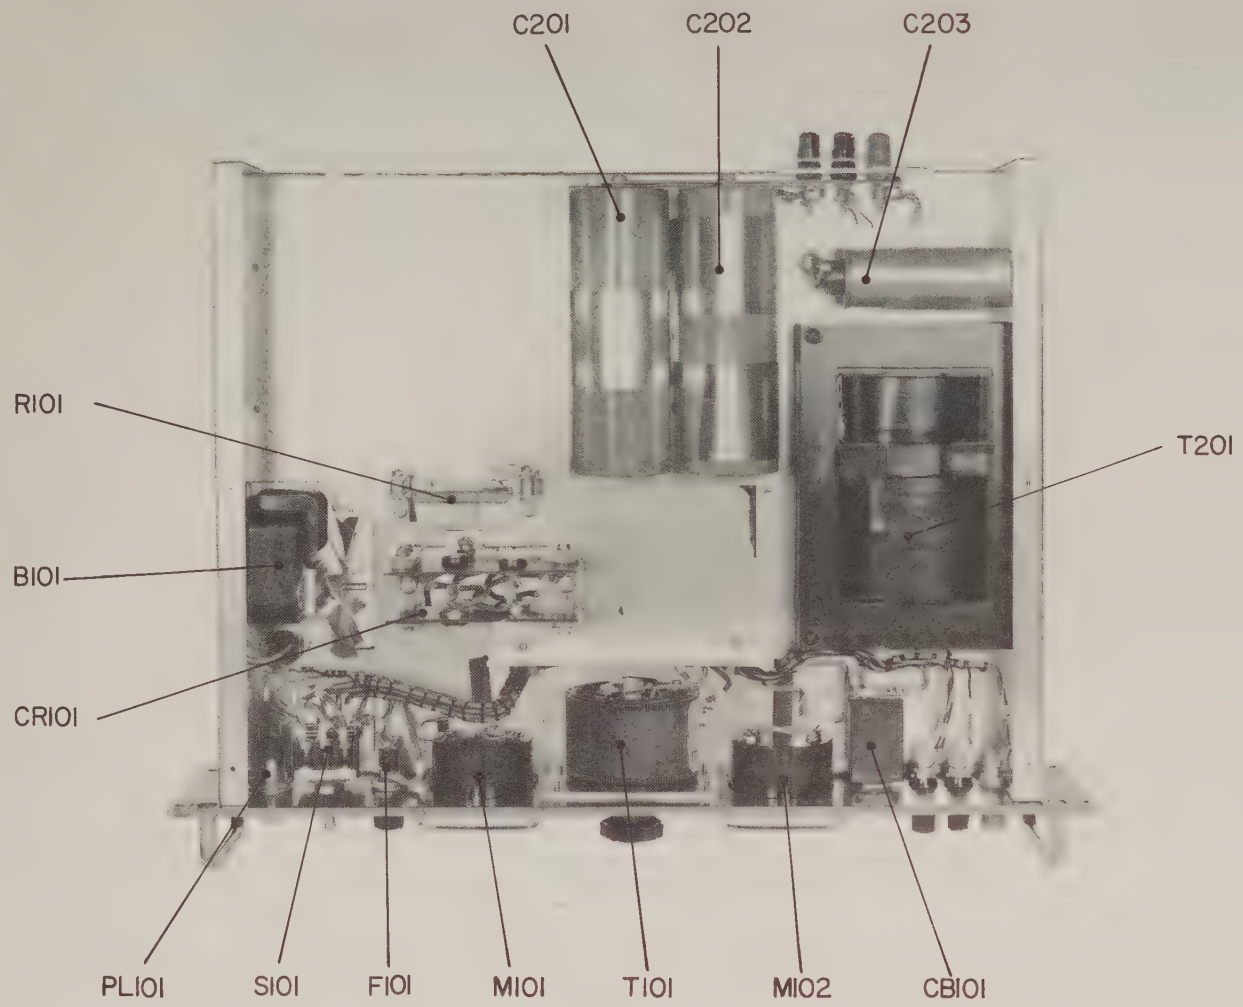

KEPCO INC.
FLUSHING NEW YORK

ITEM POWER UNIT	DES 11-8-61
	APPD
MODEL PR 155- 1M	DFTM P. HOLZMACHER
DWG No. BM01755	CHKD M. R.

B-M0173I

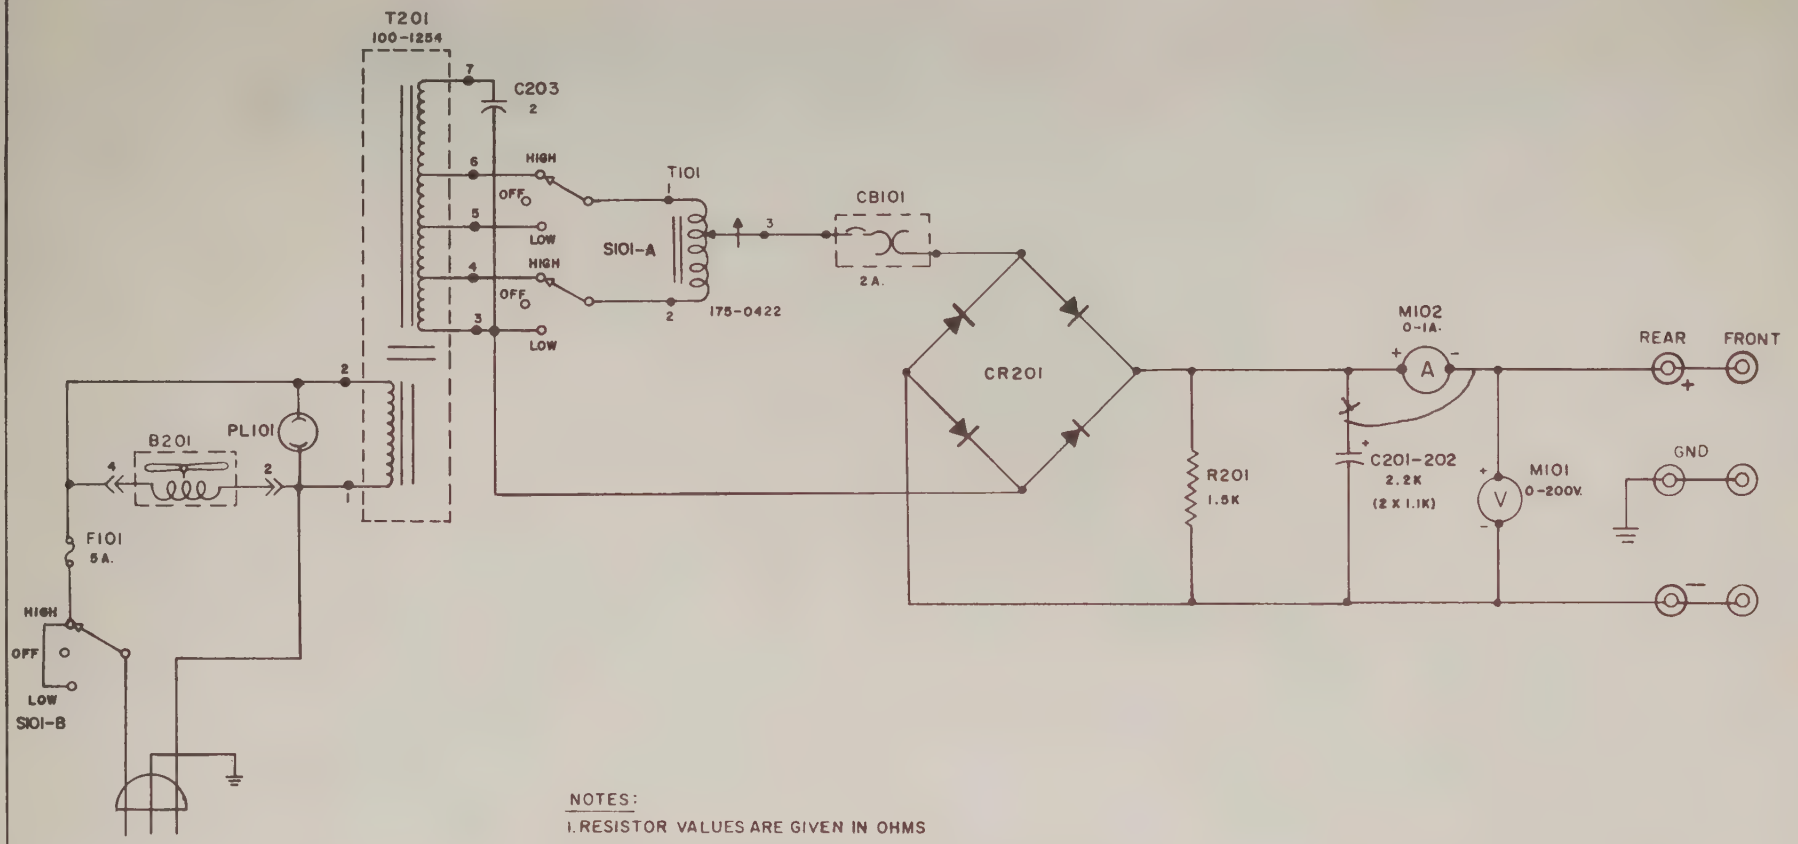

NOTES:

1. RESISTOR VALUES ARE GIVEN IN OHMS
2. CAPACITOR VALUES ARE GIVEN IN MICROFARDS
3. METERS M101 AND M102 USED IN MODEL PR 155-1M ONLY.
4. S101-A, S101-B GANGED TOGETHER.
5. ORDER REPLACEMENT PARTS BY KEPCO PART NUMBER PROVIDED IN PARTS LIST SECTION.

KEPCO LABORATORIES	
FLUSHING NEW YORK	
ITEM: SCHEMATIC POWER UNIT	DES XX
	APPD XX
MODEL PR 155-1	DFTM M.R. 10-27-61
DWG NO B-M01731	CHKD XX

C M01562

REVISIONS	DRAWN	CHKD.	APPD.	DATE

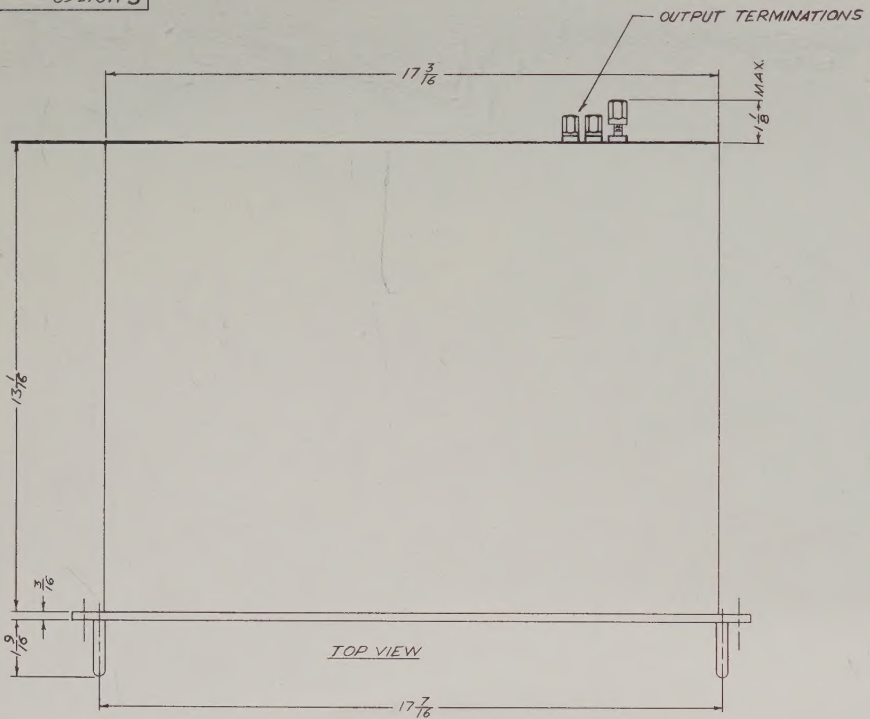

TOP VIEW

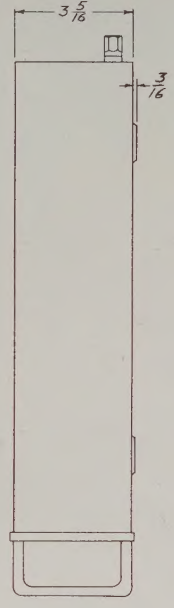

SIDE VIEW

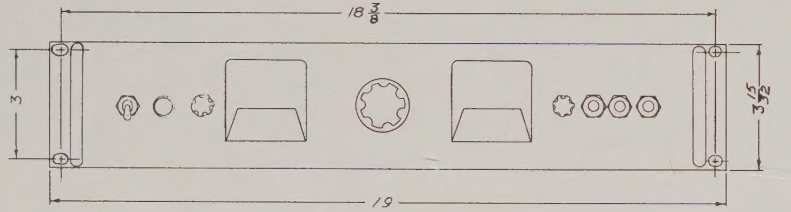

FRONT VIEW

NOTES:
USED ON MODELS

PR-15-10
PR-310-06
PR-155-1
PR-380-2.5
PR-38-5

TOLERANCE UNLESS OTHERWISE SPECIFIED: FRACTIONS ± 1/64 DECIMALS ± .005 ANGLES ± 1/2°

DEFIANCE NO. 1000H

KEPCO INC.
FLUSHING, N.Y.

TITLE: OUTLINE DRAWING

DRAWN	CHECKED	APPROVED	DATE
R.A	TEZ	G Bykes	8-29-61

MODEL NO.	PART NO.	SCALE
3½ PR - SERIES		HALF

DWG. NO. C M01562

131-38 SANFORD AVENUE • FLUSHING 52, N. Y. • Area Code 212 IN 1-7000 • TWX # NY 4-5196

146-0045 - 1/62 -12M